



32" LCD MONITOR

LDT322V

- ADVANCED HIGH-DEFINITION DIGITAL SIGNAGE DISPLAY
- WXGA 1366 X 768 NATIVE RESOLUTION
- REDUCES POWER CONSUMPTION BY 40%
- MULTIPLE SCREEN SAVER FUNCTION
- PROGRAMMABLE SCHEDULING

LEADING THE EVOLUTION OF
HIGH-DEFINITION
DIGITAL SIGNAGE


32" LCD MONITOR LTD1322V



MULTIPLE STANDARD INPUT AND OUTPUT CONNECTORS

- 1 AC IN connector
- 2 RGB 1 in (DVI-D)
- 3 RGB 2 IN (mini D-Sub 15 pin)
- 4 RGB 3 IN (R, G, B, H, V) (BNC)
- 5 VIDEO OUT (mini D-Sub 15 pin)
- 6 DVD/HD IN (BNC)
- 7 AUDIO IN 1,2,3
- 8 AUDIO OUT
- 9 VIDEO IN/OUT
- 10 EXTERNAL CONTROL (mini D-Sub 9 pin)
- 11 EXTERNAL SPEAKER TERMINAL

Rear Connector Panel

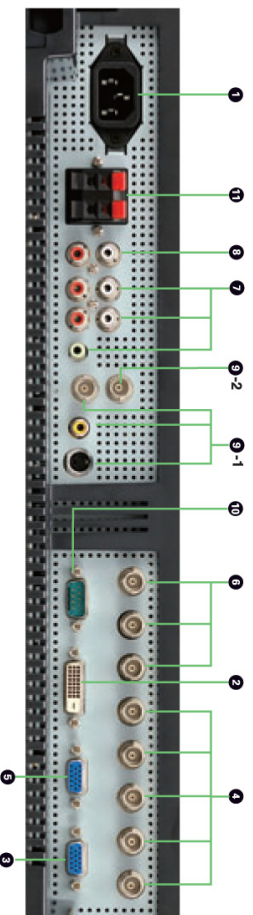

CLASS	32" (Diagonal) LCD Monitor
VIEWABLE IMAGE SIZE	27.5" x 15.4"
ORIENTATION	Landscape / Portrait
BRIGHTNESS/LUMENS	450 cd/m ²
PIXEL PITCH	0.511 mm
CONTRAST RATIO	2500:1
DIMENSIONS (W x H x D in.)	31.1" x 18.8" x 5.2" (without stand)
WEIGHT (WITHOUT STAND AND SPEAKERS)	32 lbs. (Net)
BEZEL WIDTH	1.8"
RESPONSE TIME	6.5 ms (gray to gray)
VIEWING ANGLE	Horizontal and vertical: 178°
VIDEO/AUDIO INPUTS AND OUTPUTS	mini D-Sub 15 pin In/Out, DVI-D, BNC (R, G, B, H, V), S-Video, Composite (BNC, RCA), Component (BNC), Audio LR (RCA), Audio Stereo mini jack
SPEAKER OUTPUT	External speaker jack
CONTROL INPUT/OUTPUT	RS232C (mini D-Sub 9 In/Out)
POWER CONSUMPTION (WITHOUT SPEAKERS)	85 W
ESTIMATED BACKLIGHT LIFE	Up to 50,000 hours*
AUDIO SPEAKER	Optional: SP-322V
TABLE STAND	Optional: ST-322V
WALL MOUNT COMPATIBILITY	Optional: CTM-VESA
WARRANTY	3-years parts and labor, Express Replacement Assistance, toll-free 24x7 technical support

*Results may vary depending on usage and operating environment

MITSUBISHI ELECTRIC
PRESENTATION PRODUCTS

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.
Presentation Products Division
Toll Free: 888.307.0349
Email: ppinfo@midea.com
www.mitsubishipresentations.com
Canada
Mitsubishi Electric Sales Canada Inc.
Information Technologies Group
Phone: 905.475.7728
www.mitsubishielec.ca

LTD1322V